

TOPCon

DHN-60X16(BW)

0~+5W

470~485 W



Higher Power Generation Efficiency

N-type TOPCon module could increase power generation by 3%+ per watt compared with PERC module



Lower Degradation Rate, PID Resistance

First-year $\leq 1\%$, 2-30 year $\leq 0.4\%$; excellent Anti-PID performance



Lower Temp. Coefficient

More power generation under high-temperature



Better Dim Light Performance

Excellent performance under dim light

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO

ISO 45001: 2018/International standards for occupational health & safety

ISO 14001: 2015/Standards for environmental management system


ISO 9001: 2015/Quality management system



Quality Guarantee

15-Year Material & Technology Warranty


30-Year Linear Power Output Warranty

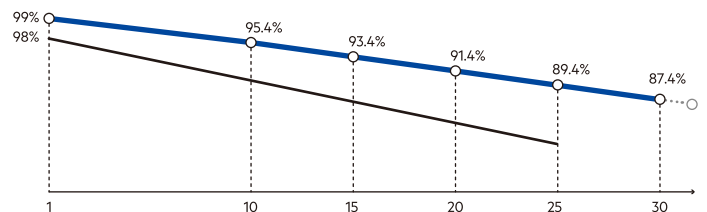

▲ DAH Solar Linear power output guarantee ▲ Standard Linear power output guarantee

Mechanical Specification

Cable	4.0mm ² , 350/250mm in length, (Including Connector) length can be customized
No.of Cells	120 (6×20)
Glass	3.2mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	22kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	1903×1134×30mm
Packing	36pcs/Pallet, 864pcs/40HQ

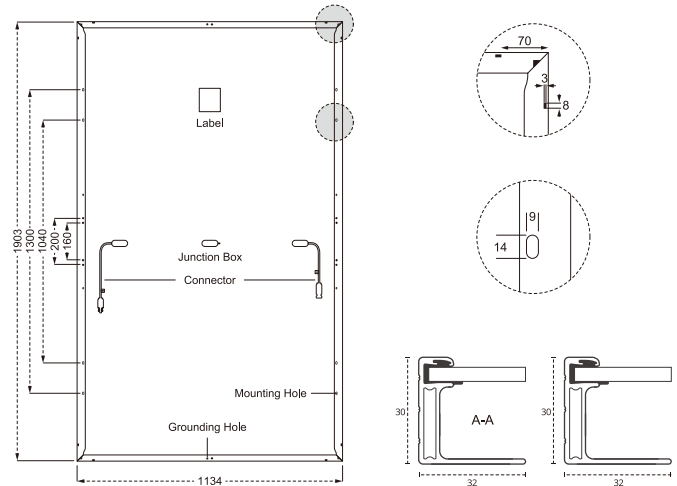

STC-Electrical Characteristics

Module Type	DHN-60X16(BW)			
Maximum Power (Pmax/W)	470	475	480	485
Open-circuit Voltage (Voc/V)	42.4	42.6	42.8	43.0
Maximum Power Voltage (Vmp/V)	36.0	36.2	36.4	36.6
Short-circuit Current (Isc/A)	13.90	13.96	14.02	14.08
Maximum Power Current (Imp/A)	13.06	13.12	13.19	13.25
Module Efficiency (%)	21.78	22.01	22.24	22.47

Standard Test Environment : Irradiance 1000W/m² , Cell temperature 25°C, Spectrum AM1.5

NOCT—Electrical Characteristics

Maximum Power (Pmax/W)	353	357	361	365
Open-circuit Voltage (Voc/V)	40.3	40.5	40.7	40.9
Maximum Power Voltage (Vmp/V)	34.2	34.4	34.6	34.8
Short-circuit Current (Isc/A)	11.22	11.27	11.32	11.37
Maximum Power Current (Imp/A)	10.33	10.39	10.44	10.49

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Operating Parameters

Maximum System Voltage	1500V DC
Power Tolerance	0~+5W
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of Isc (α Isc)	0.046%/°C
Temperature Coefficient of Voc (β Voc)	-0.25%/°C
Temperature Coefficient of Pmax (γ Pmp)	-0.30%/°C

Mechanical Loads

Snow load, frontside / Wind load, backside	5400Pa/2400Pa
--	---------------

I-V Curve

